

# Thermaltake SMART CASE FAN II Variable Fan Speed Control

## SMART CASE FAN II

P/N : A1357 **3 FAN Functions in 1**  
APPLICATION FOR ALL SERIES CASE



**Function 1:**  
Full Speed 4800 rpm

### TEMPERATURE CONTROL

Sensor



### Function 2:

Temp. Control, Fan Speed Auto Control Setting:

1300rpm at 20 °c~ 4800rpm at 55 °c

Temp. Sensor attach to CPU or Heatsink

### VARIABLE FAN SPEED


Controller



### Function 3:

Adjustable Manual Fan Speed

Control From 1300 rpm to 4800 rpm

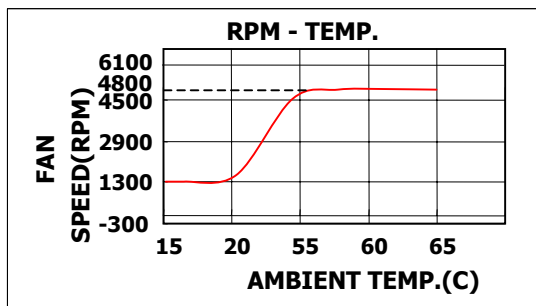

## SPECIFICATIONS :

Fan Dimension: 80x80x25 mm

Rated Voltage: 12VDC

Started Voltage: 6VDC

Rated Current: 0.20AMP ~ 0.70AMP

Power Input: 2.40W ~ 8.40W

**FAN Speed Control setting:**

**1300 rpm at 20°C ~**

**4800 rpm at 55°C**

Max. Air Flow: 20.55 CFM at 1300 rpm

75.7 CFM at 4800 rpm

Air Pressure: 1.45mmH<sub>2</sub>O at 1300rpm

8.43mmH<sub>2</sub>O at 4800rpm

Noise: 17 dB at 1300 rpm

48 dB at 4800 rpm


Bearing Type: Two Ball bearing

Lift Time: 50,000 Hours

Connector: 3 Pin

**Tt Fan grille**

## DIMENSIONS

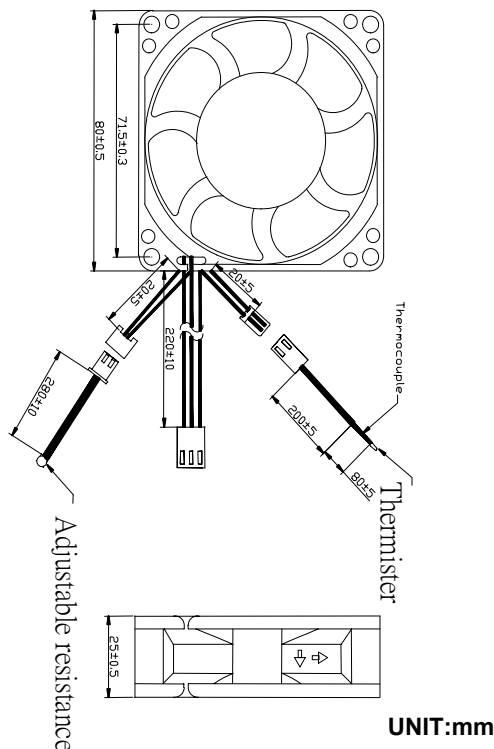

<http://www.thermaltake.com>